


Capacity / WHP / VHP / NIPR

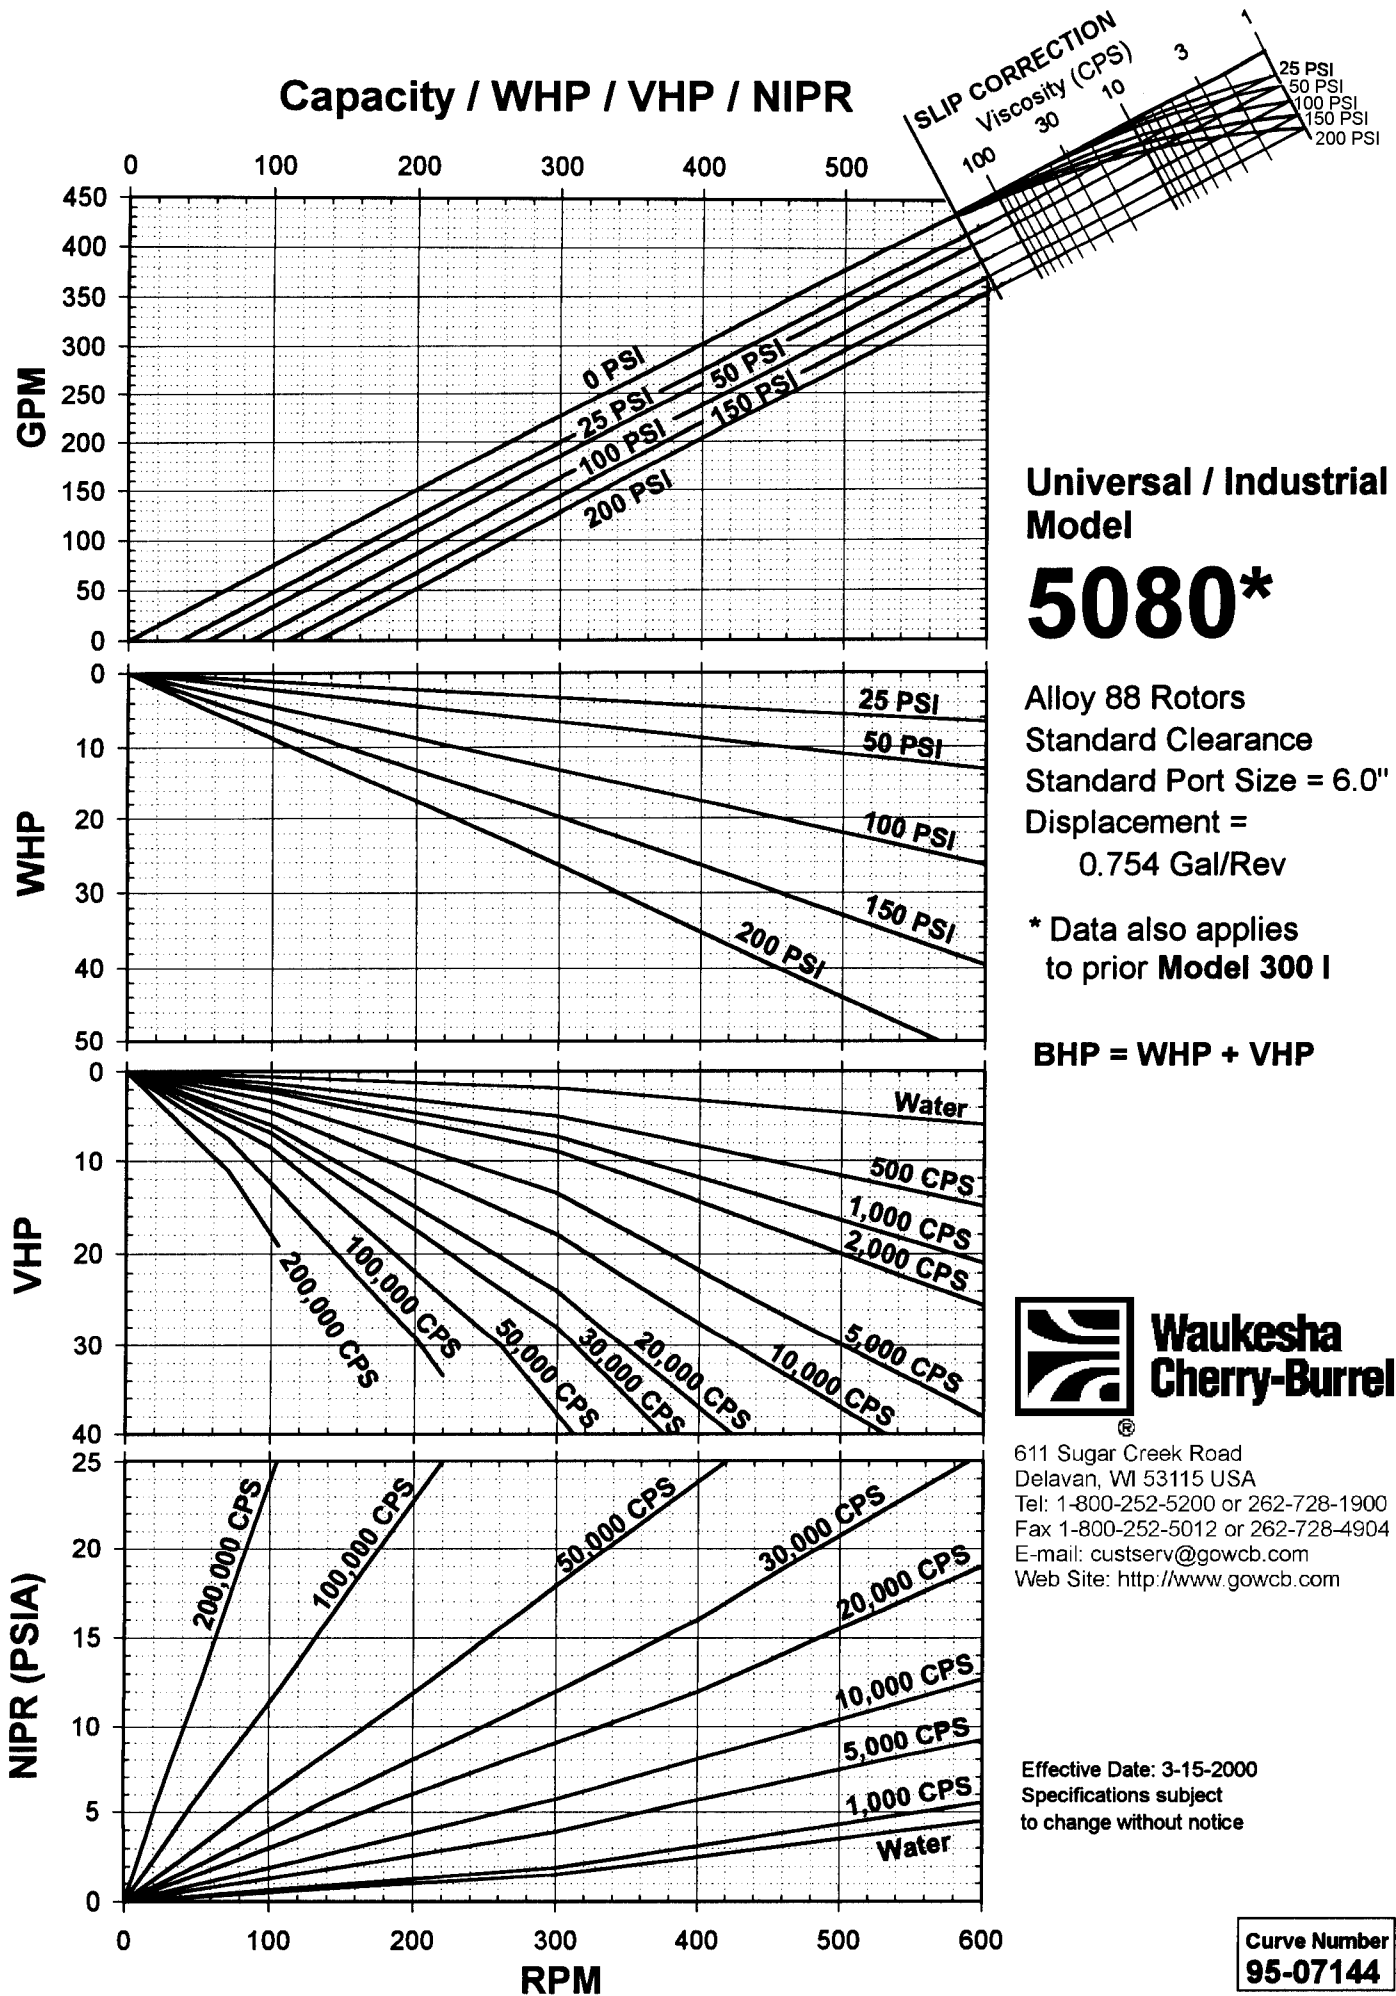

Universal / Industrial Model

5080*

Alloy 88 Rotors
 Standard Clearance
 Standard Port Size = 6.0"
 Displacement =
 0.754 Gal/Rev

* Data also applies
 to prior Model 300 I

BHP = WHP + VHP



**Waukesha
 Cherry-Burrell**

611 Sugar Creek Road
 Delavan, WI 53115 USA
 Tel: 1-800-252-5200 or 262-728-1900
 Fax 1-800-252-5012 or 262-728-4904
 E-mail: custserv@gowcb.com
 Web Site: <http://www.gowcb.com>

Effective Date: 3-15-2000
 Specifications subject
 to change without notice

Curve Number
95-07144