


# Capacity / WHP / VHP / NIPR

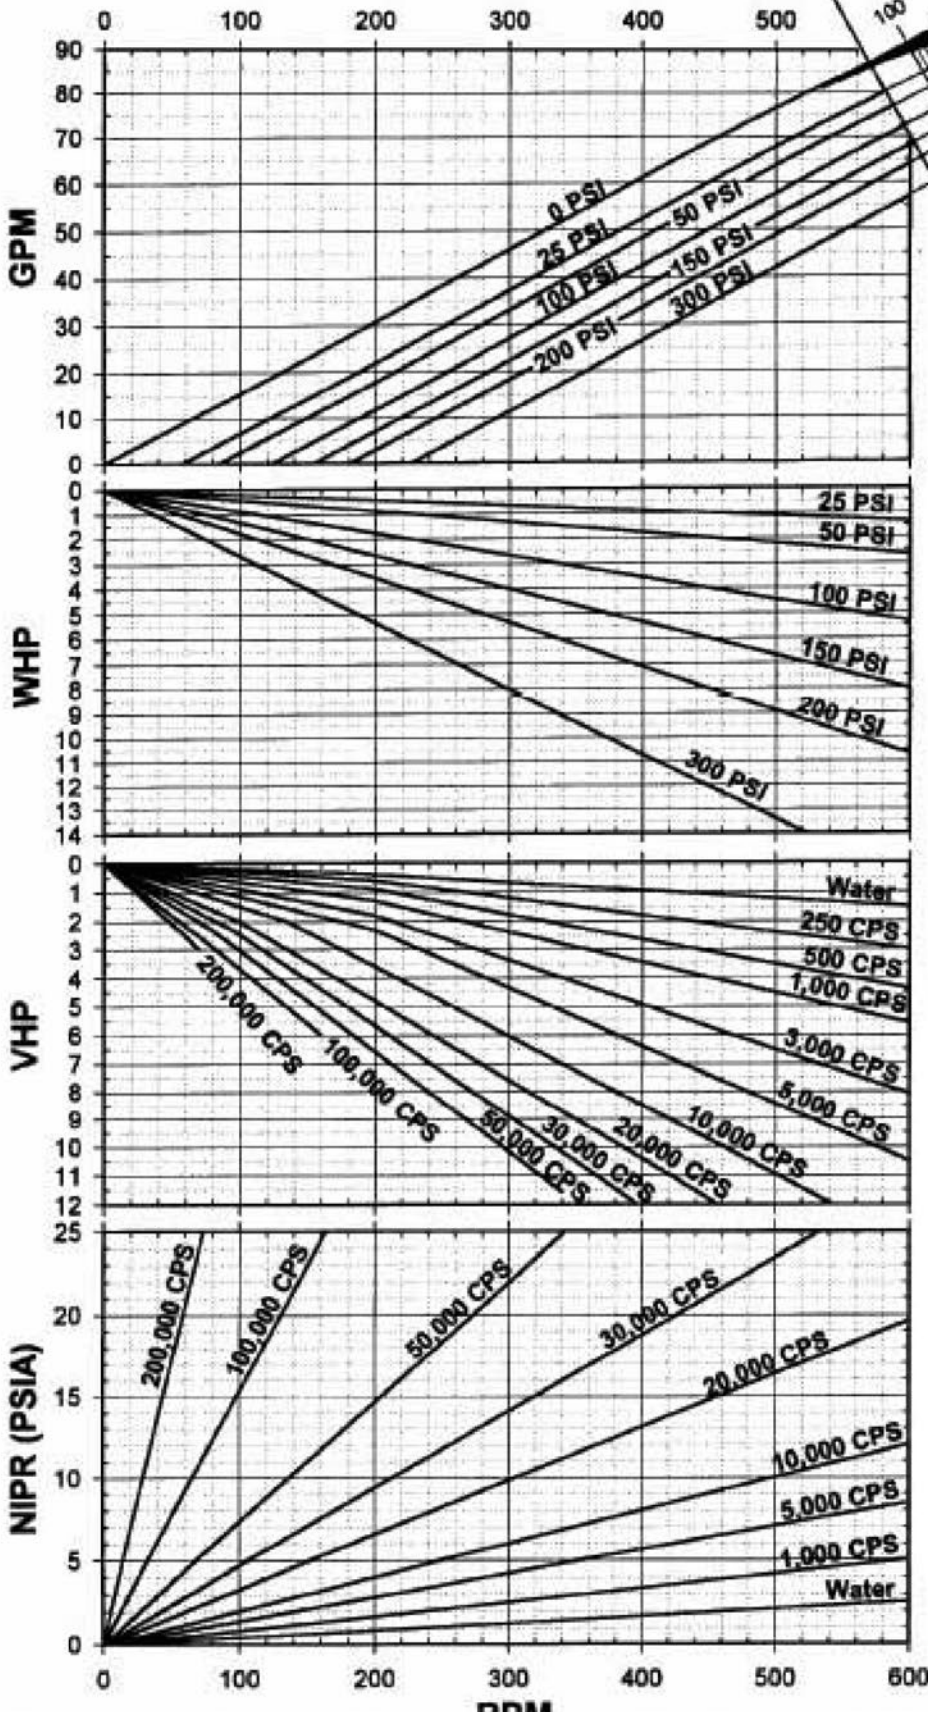

**Universal® 2  
Rectangular Flange  
Model**

## 064-U2-RF

Alloy 88 Rotors  
Standard Clearance  
Standard Port Size: 2.5"  
Displacement:  
0.153 gal/rev

**BHP = WHP + VHP**

**SPXFLOW**

Waukesha  
Cherry-Burrell

611 Sugar Creek Road  
Delavan, WI 53115 USA  
T: 1-800-252-5200 / 262-728-1900  
F: 1-800-252-5012 / 262-728-4904  
E: wcb@spxflow.com  
www.spxflow.com

Effective date: 01/01/2006

Specifications subject to change  
without notice.

Curve Number  
**95-07155**