

WAUKESHA Series S200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
 % = Efficiency Percentage

CAPACITY CURVES


Based on water at 70°F. (22°C.)

MODEL: S2065HV

60 Hz 1750 RPM

SIZE: 3.0 x 2.0 x 6.5

Flow Cubic Meters Per Hour

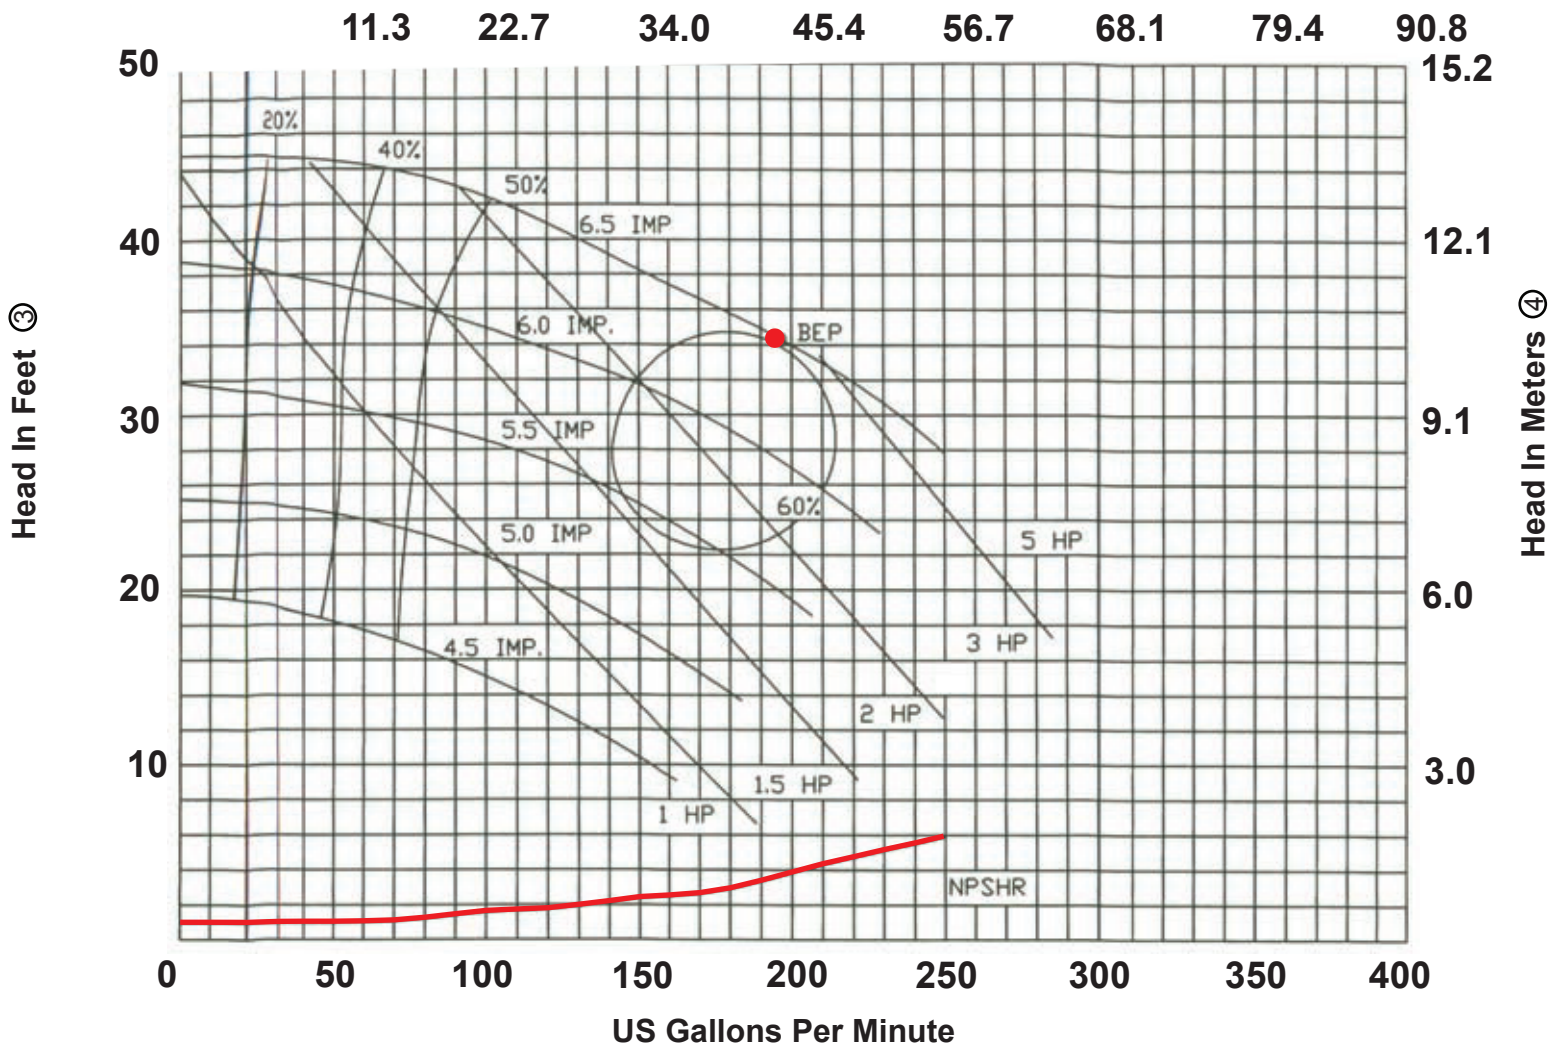

NOTES

- ① Impeller diameters available in 1/16-inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $HP \times 0.746 = Kw$

SPXFLOW

Waukesha
Cherry-Burrell

CURVE NUMBER
95-07191

EFFECTIVE DATE
January = 2010

611 Sugar Creek Road
Phone: 262-728-1900
www.spxflow.com/wcb

Delavan, WI 53115
Fax 262-728-4904