

WAUKESHA Series 200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
 % = Efficiency Percentage

CAPACITY CURVES

Based on water at 70°F. (22°C.)


MODEL: 2085LV

50 Hz 2900 RPM

SIZE: 2 x 1-1/2 x 8-1/2


CUBIC METERS PER HOUR

① IMPELLER DIAMETER INCHES (mm)

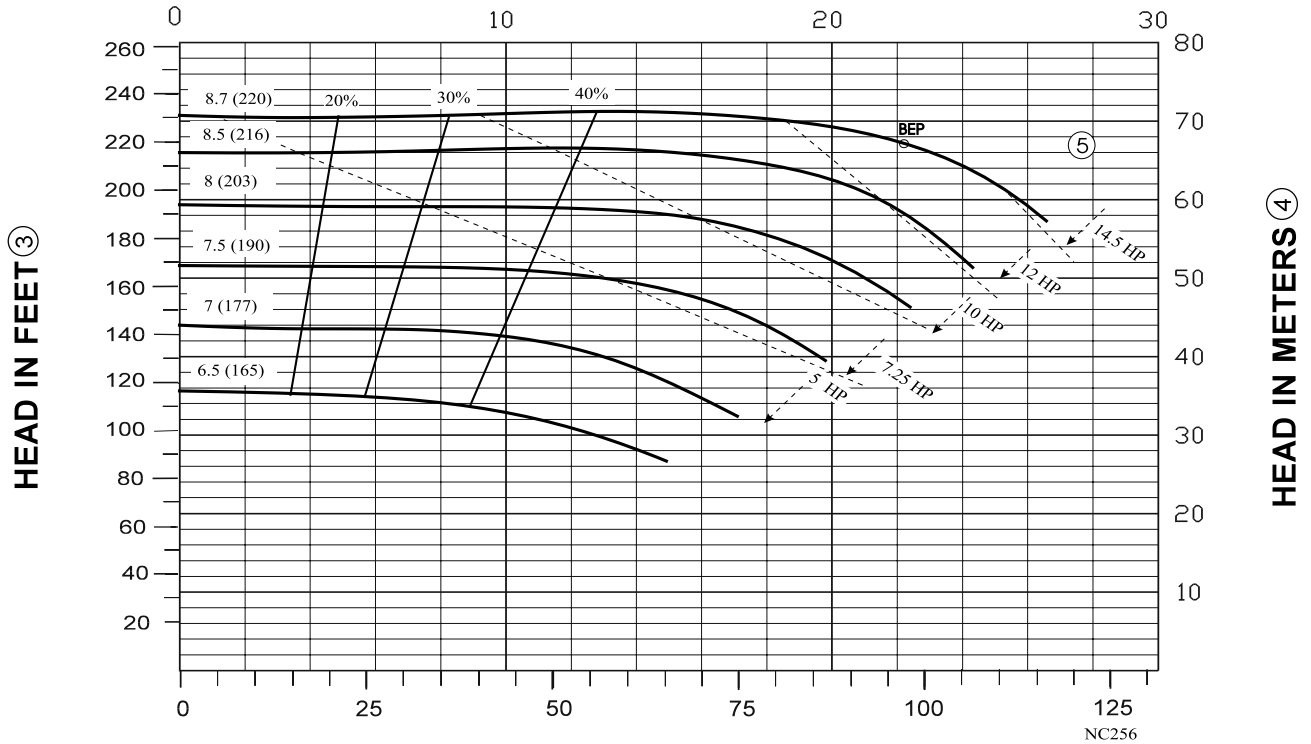

US GALLONS PER MINUTE

CUBIC METERS PER HOUR

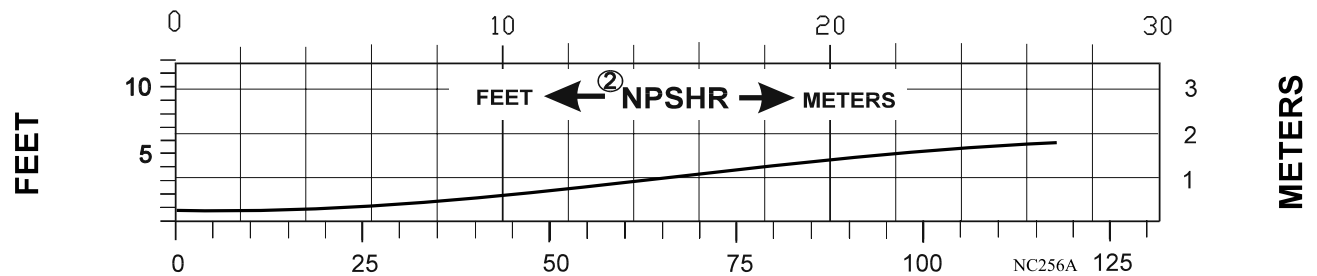

US GALLONS PER MINUTE

NOTES

- ① Impeller diameters available in 1/16-inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ PSI = $\frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $\text{Kg/cm}^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $\text{HP} \times 0.746 = \text{Kw}$

SPXFLOW

Waukesha
Cherry-Burrell

611 Sugar Creek Road
 Phone: 262-728-1900
 www.spxflow.com/wcb

Delavan, WI 53115
 Fax 262-728-4904

CURVE NUMBER
95-07032

EFFECTIVE DATE
 05-23-2002

PAGE NUMBER **032**