

# WAUKESHA Series S200 CENTRIFUGAL PUMPS


● = Best Efficiency Point  
 % = Efficiency Percentage

**CAPACITY CURVES**  
 Based on water at 70°F. (22°C.)

**MODEL: S2065LV**  
**60 Hz 1750 RPM**  
**SIZE: 2.5 x 1.5 x 6.5**

Flow Cubic Meters Per Hour

4.5      9.0      13.6      18.1      22.7      27.2

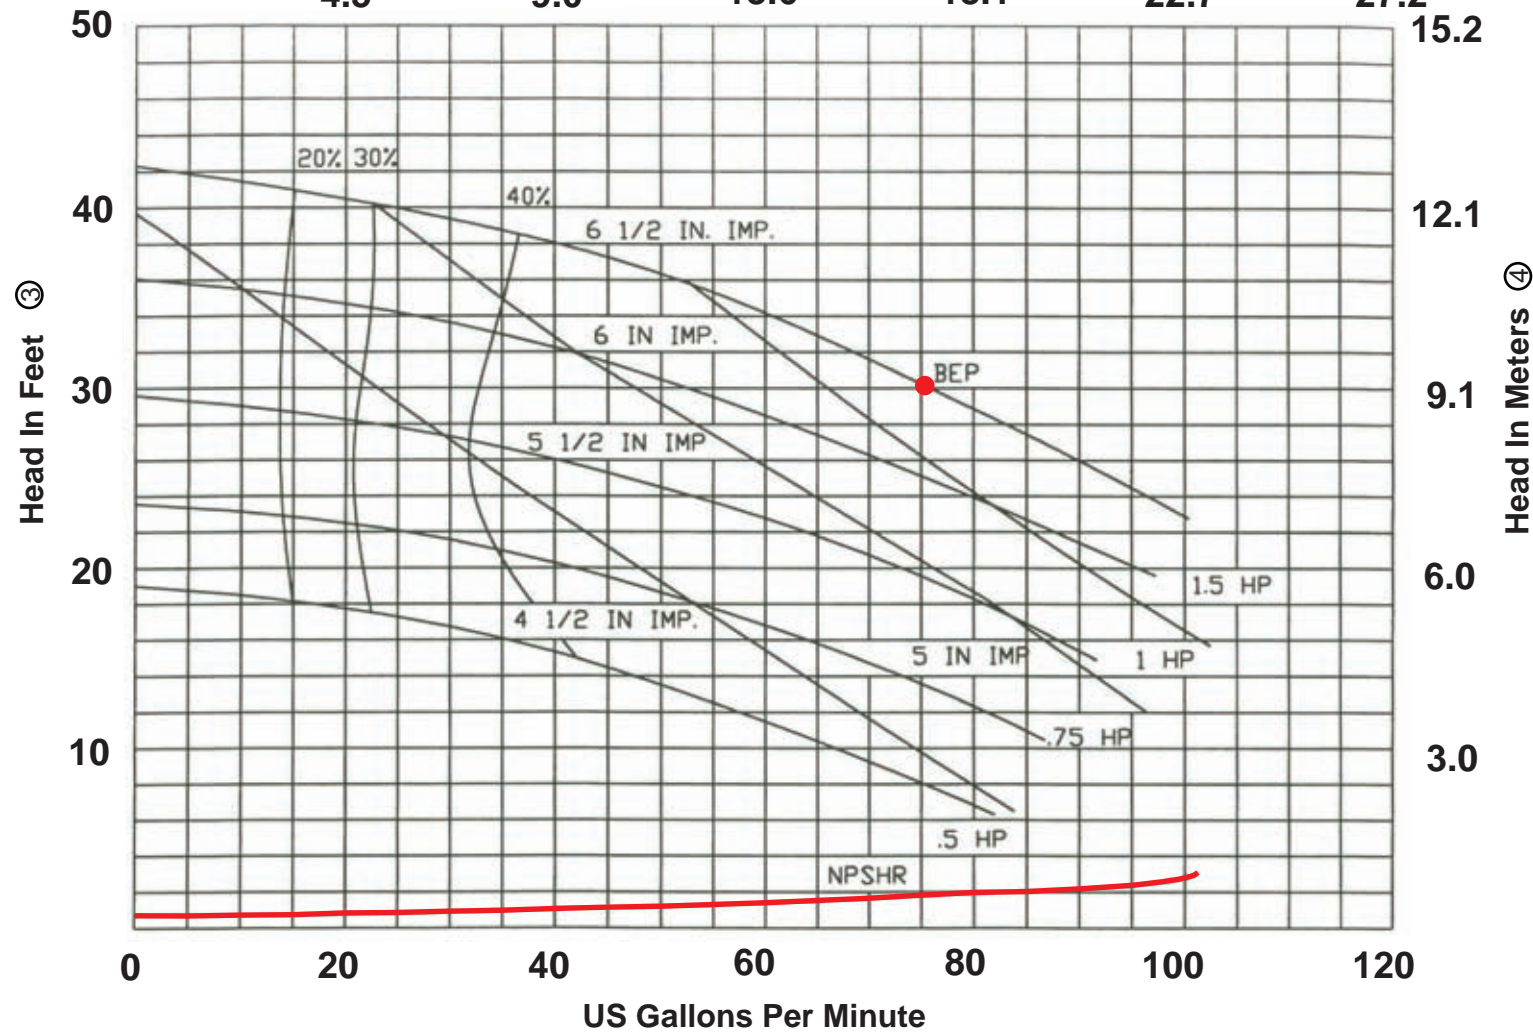

**NOTES**

- ① Impeller diameters available in 1/16-inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③  $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④  $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤  $HP \times 0.746 = Kw$



611 Sugar Creek Road Delavan, WI 53115  
 Phone: 800-252-5200 or 262-728-1900  
 Fax: 800-252-5012 or 262-728-4904

CURVE NUMBER  
**95-07171**

EFFECTIVE DATE  
 January = 2010