

Anhydro MicraSpray 150

Small Scale

The small scale spray drying plant, Anhydro MicraSpray 150, is designed for drying of products in small-scale production, R&D departments, universities and public institutions worldwide. This dryer is designed with specific focus on flexibility in the design and configuration, safety during operation, process control, ease of cleaning/sanitary design and scalability.

The small scale dryer is used worldwide by customers in the food, dairy, chemical and pharmaceutical industries.

The design of the dryer is based on a unique modular concept consisting of a basic plant and a large number of optional items, which enables customers to customize each plant to match their exact requirements.

Included Equipment for a Basic Plant

- Feed vat
- Peristaltic feed pump
- Feed line
- Two-fluid nozzle atomizer, co-current
- Air intake filter
- Electrical air heater
- Drying chamber with rupture disc for explosion protection
- Drying chamber prepared for installation of pneumatic hammer(s)
- Cyclone with powder container
- Exhaust fan and ducting
- Control panel with PLC incl. touch screen and data logging facility
- Support structure

Other Versions

- Closed circuit



Optional Equipment for a Basic Plant

- Two-fluid nozzle atomizer, counter-current
- Centrifugal Atomizer with optional ATEX components
- Fine inlet air filter or HEPA filters
- Pneumatic hammer
- Two-point discharge
- Rotary valve
- Bag filter
- Additional powder container
- Vent duct
- Indoor explosion venting system
- Simple manual cleaning equipment
- GMP/Qualification documentation (IQ, OQ)

For other specific requirements please contact SPX FLOW


ANHYDRO MICRASPRAY 150

MAX. INLET AIR TEMPERATURE	350°C	MAX. KST. VALUE (WITH RUPTURE DISC)	299 barxmS-1
MAX. WATER EVAPORATION (OUTLET TEMP. 70°C)*	14 kg/H	NOISE EMISSION*	85 dB (A)
MAX. DRYING AIR RATE	150 kg/H	PRODUCT CONTACTING PARTS	AISI 316
DRYING CHAMBER DIAMETER	900 mm	EXTERNAL SURFACES	AISI 304
POWER SUPPLY, STANDARD, AT 50 Hz	3x400 V	FLOOR SPACE LxW	2.5x1.35 m
SUCTION FAN	3 kW	HEIGHT	2.5 m
AIR HEATER	15 kW	RECOMMENDED FREE HEIGHT	3.2 m
COMPRESSED AIR CONSUMPTION AT 1.5 TO 5.6 bar (G)	58-247 N L/min	WEIGHT, NET*	900 kg
PRESSURE SHOCK RESISTANCE, CHAMBER	1 bar		
PRESSURE SHOCK RESISTANCE, CYCLONE	10 bar		
PRESSURE SHOCK RESISTANCE, FAN	10 bar		


* Approximately

The MicraSpray 150 plant design complies with regulations and standards according to CE, ATEX, and GMP guidelines for material intended to come into contact with Food.

WATER EVAPORATION (KG/H)

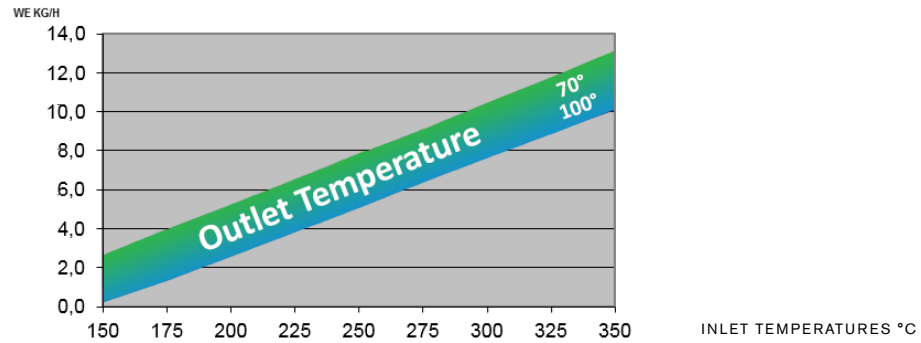

PROCESS FLOW

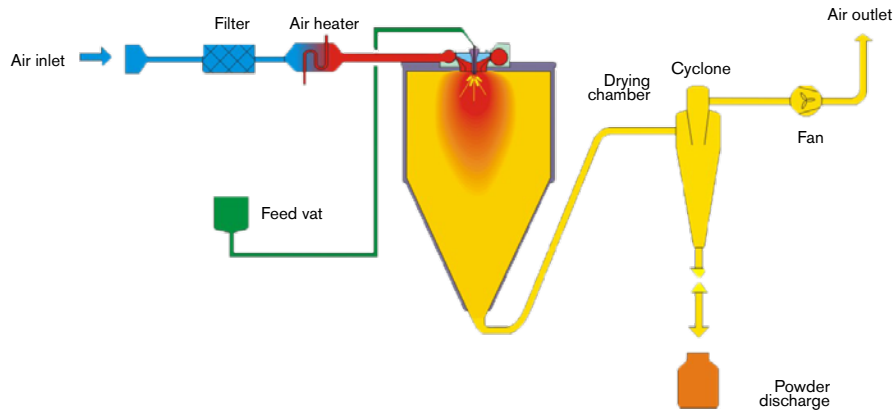

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPXFLOW

SPX FLOW 105 CrossPoint Pkwy, Getzville, NY 14068

P: +1 (716)-692-3000 E: leads@spxflowleads.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "s" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 03/2019 ANH-103-US COPYRIGHT © 2019 SPX FLOW, Inc.