

Anhydro MicraSpray 750

Small Scale

The small scale spray drying plant, Anhydro MicraSpray 750, is designed for drying of products in small scale production, R&D departments, universities and public institutions worldwide. This dryer is designed with specific focus on flexibility in the design and configuration, safety during operation, process control, ease of cleaning/sanitary design and scalability.

Anhydro MicraSpray 750 is used worldwide by customers in the food, dairy, chemical and pharmaceutical industries.

The design of the Anhydro MicraSpray 750 is based on a unique modular concept consisting of a basic plant and a large number of optional items, which enables customers to customize each plant to match their exact requirements.

Included Equipment for a Basic Plant

- Feed pump
- Feed tank
- Water tank
- Feed pipe
- Two-fluid nozzle atomizer, co-current
- Air intake filter
- Electrical air heater for main air and hot air duct
- Drying chamber with rupture disc for explosion protection
- Cyclone with powder container
- Fan and duct
- Control panel with PLC incl. touch color screen
- Support structure

Optional Equipment for a Basic Plant

- Two-fluid nozzle atomizer, counter-current
- Centrifugal atomizer
- High pressure nozzle atomizer system



- Direct or indirect gas fired heater
- Vent duct
- Indoor explosion venting system
- Explosion suppression system
- Pneumatic hammers
- Two-point discharge
- Rotary valve
- Hepa filters
- Bag filter
- Air broom
- Powder cooling and conveying system
- Wet scrubber
- CIP system
- Simple integrated cleaning system (ICS)
- GMP documentation (IQ, OQ)
- GMP execution
- Noise attenuation
- Datalogging

Other Version


- Closed circuit

ANHYDRO MICRASPRAY 750	
MAX. INLET AIR TEMPERATURE	350°C
MAX. WATER EVAPORATION (OUTLET TEMP. 70°C)	77 KG/H
MAX. DRYING AIR RATE	750 KG/H
DRYING CHAMBER DIAMETER	1,600 MM
POWER SUPPLY, STANDARD, AT 50 Hz	3x400 V
SUCTION FAN	6 kW
MAIN AIR HEATER	70 kW
FEED PUMP	0.5 kW
COMPRESSED AIR CONSUMPTION AT 1.5 TO 5.6 BAR (G)	85-212 L/MIN
PRESSURE SHOCK RESISTANCE	1 BAR


ANHYDRO MICRASPRAY 750	
MAX. KST. VALUE (WITH RUPTURE DISC)	200 BARxMxS ⁻¹
NOISE EMISSION*	85 dB (A)
PRODUCT CONTACTING PARTS	AISI 316
NON-PRODUCT CONTACTING SURFACES	AISI 304
FLOOR SPACE LxW	4,150x4,300 MM
HEIGHT	5,200 MM
TOTAL FREE HEIGHT	6,000 MM
SHIPPING VOLUME	48 M ³
WEIGHT, GROSS*	3,400 KG
WEIGHT, NET*	2,500 KG

* Approximately.

The MicroSpray 750 plant complies with regulations and standards according to CE and ATEX.

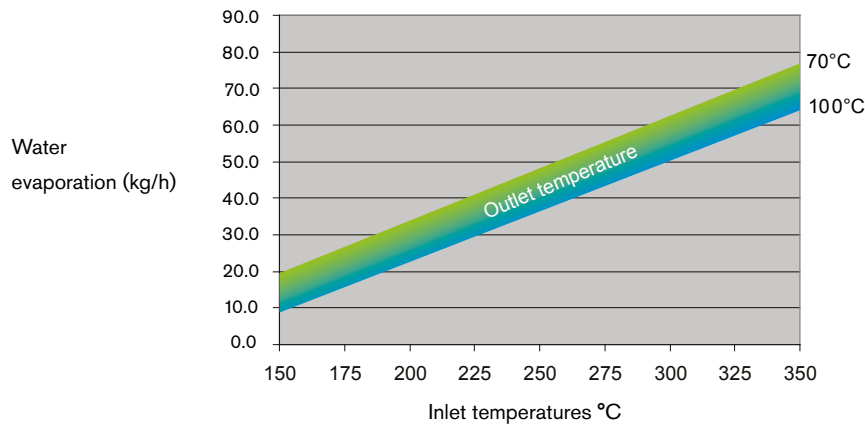

Process flow

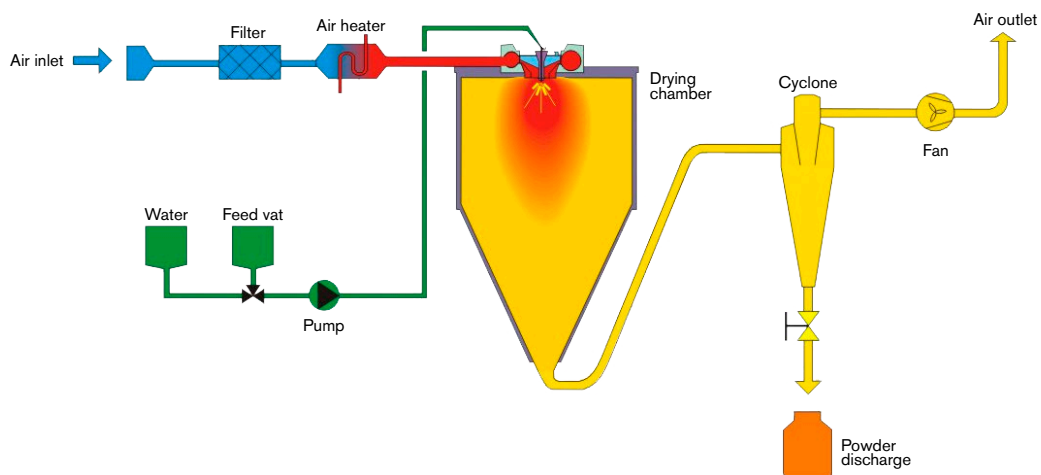

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPXFLOW

SPX FLOW Technology Danmark Oestmarken 7, DK-2860 Soeborg, Denmark

P: +4570278 222 E: ft.dk.soeborg@spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "S" and "X" are trademarks of SPX FLOW, Inc.

ISSUED 05/2019 ANH-108-GB COPYRIGHT © 2019 SPX FLOW, Inc.