
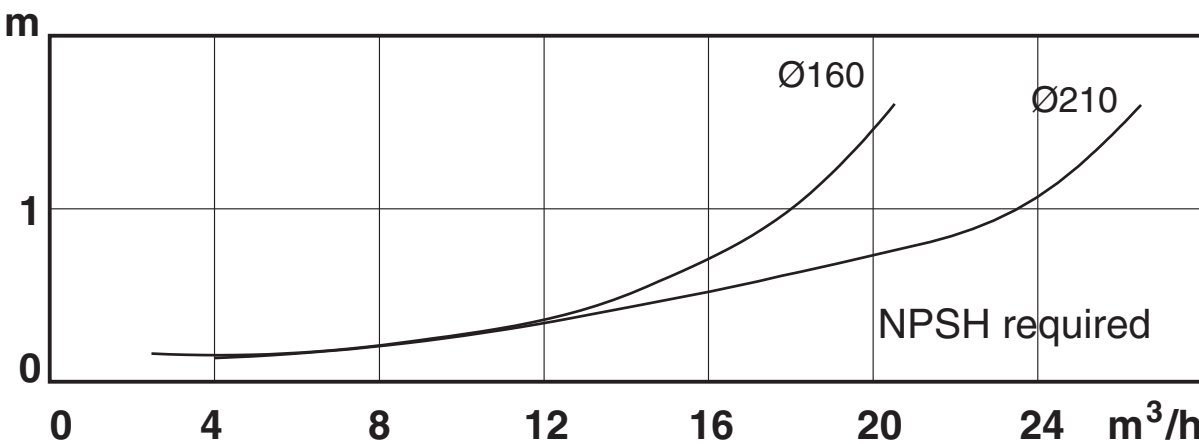
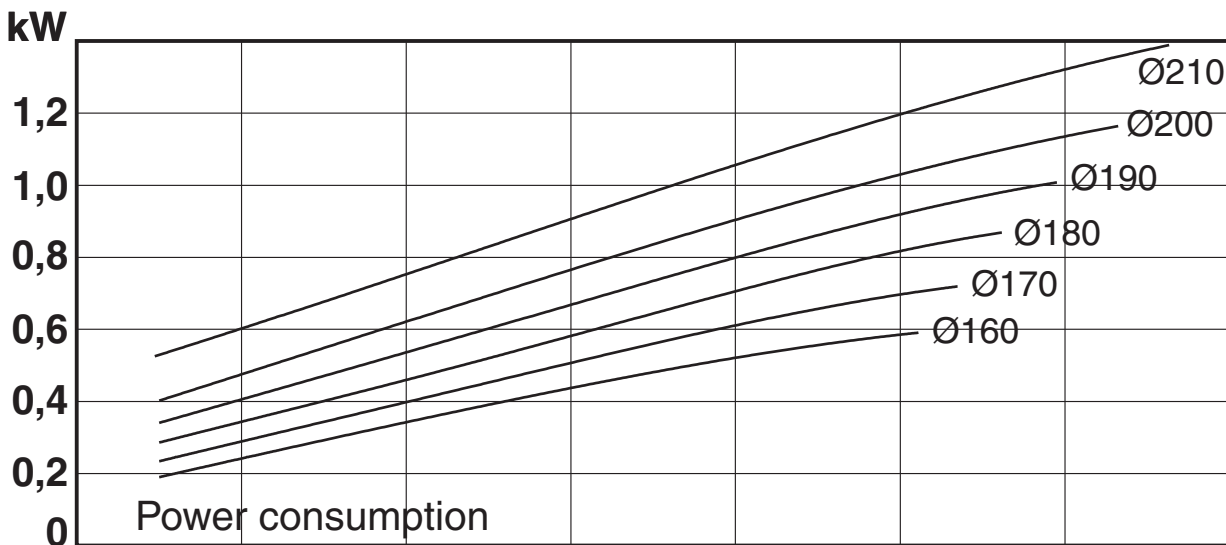


453250 ISS T 10.08

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 210 mm
 Min. dia 160 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$



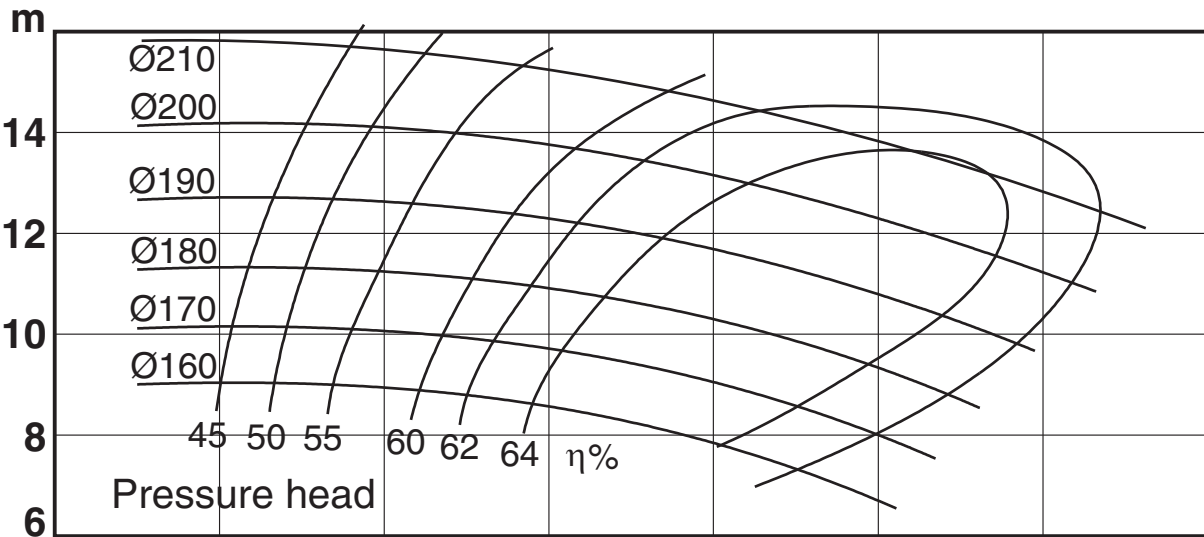


453250 ISS T 10.08

NOTE: _____

Speed: **n=2900⁻¹ 50 Hz**
 Impeller: **Max. dia 210 mm**
 Min. dia 160 mm
 Pump inlet: **63,5 mm**
 Pump outlet: **38 mm**

Performance data refer to water at 20°C
 Permissible tolerance ±5%

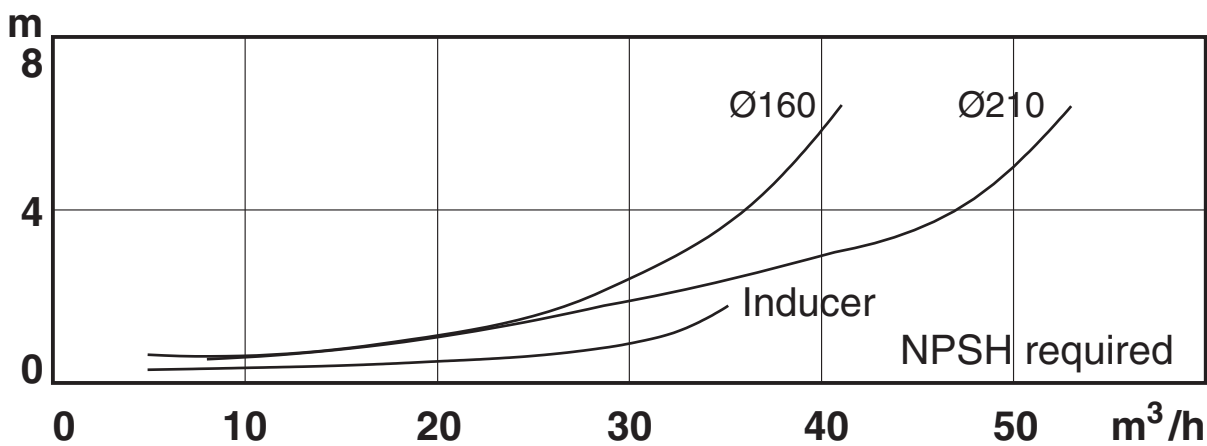
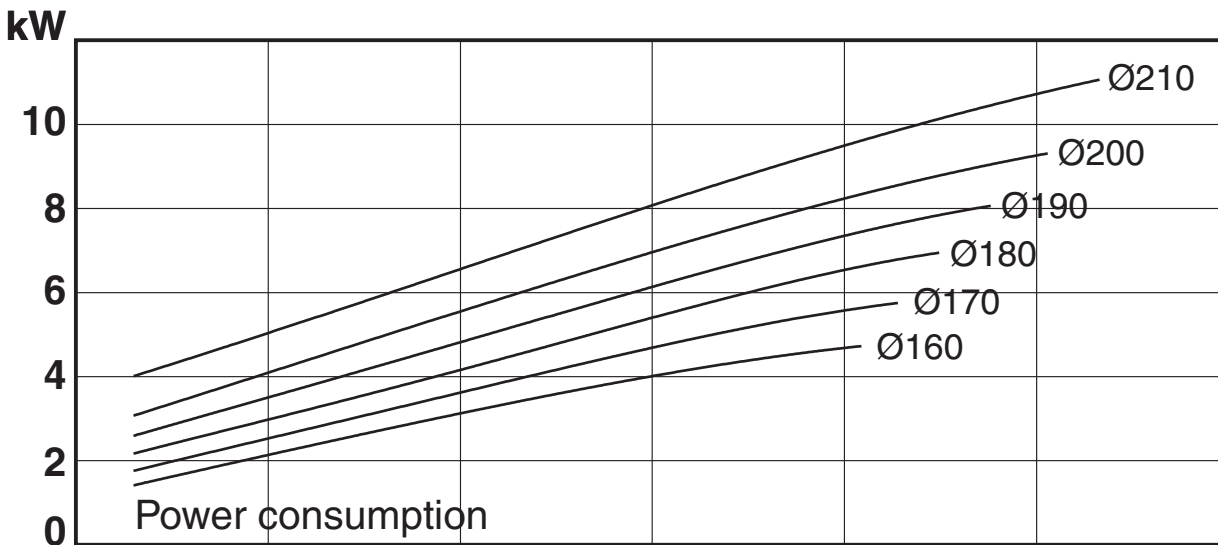
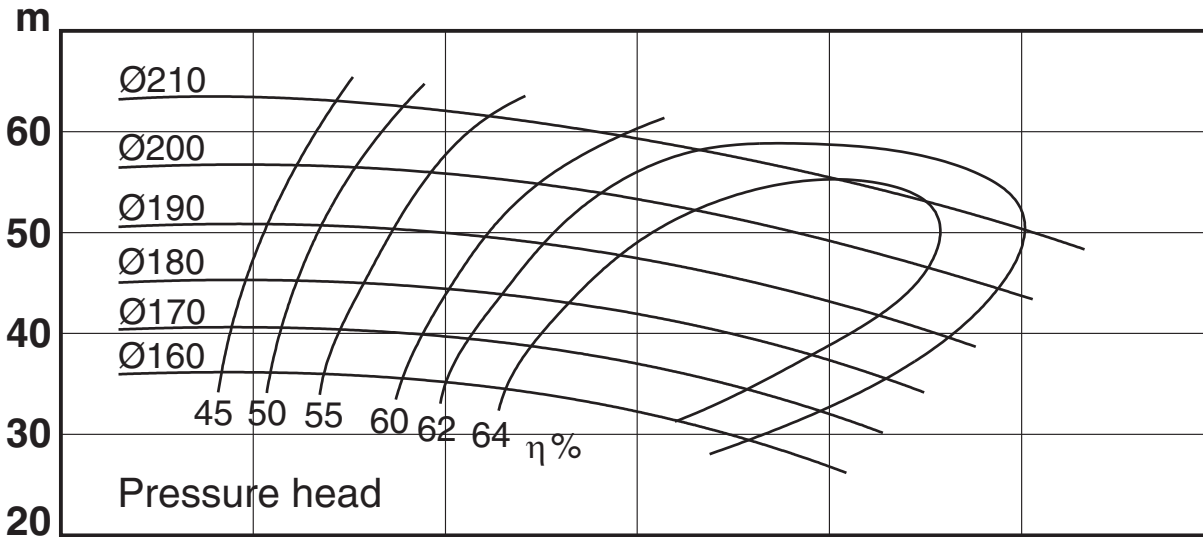


453250 ISS T 10.08

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 210 mm
 Min. dia 160 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

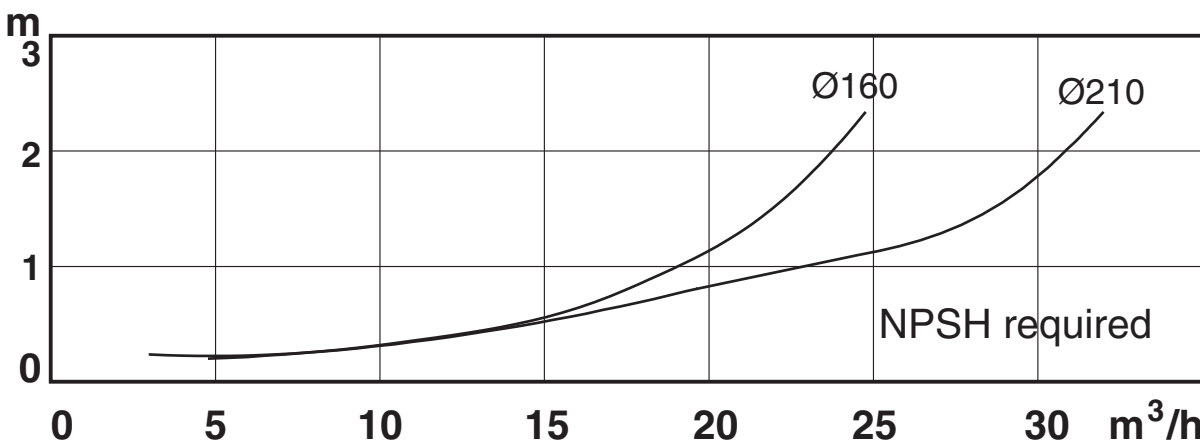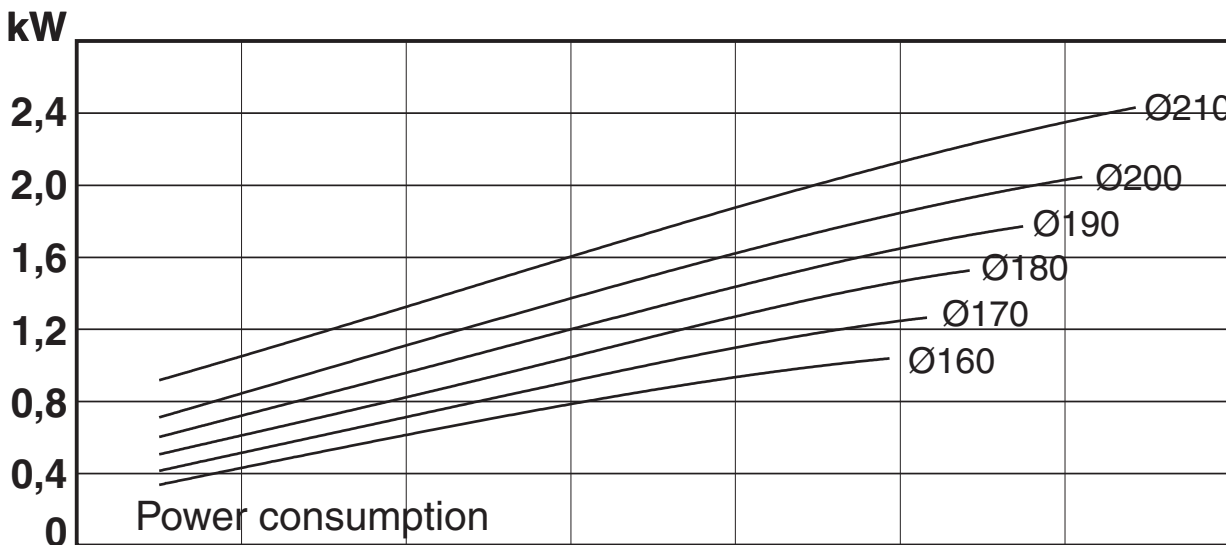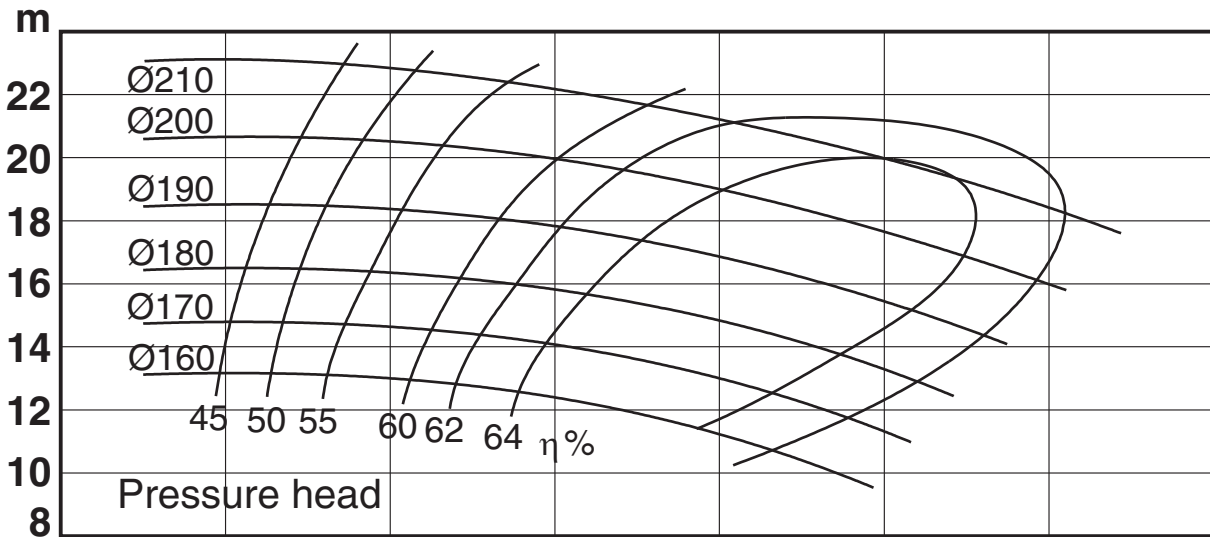

453250 ISS T 10.08

NOTE: _____

Speed: $n=3500^{-1}$ 60 Hz
 Impeller: Max. dia 210 mm
 Min. dia 160 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

