


MICRASPRAY 150CC

SMALL-SCALE PLANT



The closed-circuit small-scale spray dryer, Anhydro[®] MicraSpray 150CC, is designed for drying products in flammable organic solvents in small-scale production at R&D departments, universities and public institutions and is used worldwide by customers in the dairy, food, chemical and pharmaceutical industries.

The small-scale spray dryer is designed with specific focus on flexibility in design and configuration, safety during operation, process control, ease of cleaning, sanitary design, scalability and low emission levels. It is based on a unique modular concept consisting of a basic plant and a large number of optional items, enabling customers to customise each plant to match their exact requirements.

Basic Plant Equipment

- Feed pipe
- Two-fluid nozzle atomizer, co-current
- Air intake filter
- Electrical air heater for main air and hot air duct
- Drying chamber
- Cyclone with powder container
- Fan and duct
- Control panel with PLC incl. touch screen
- Data logging
- Support structure
- Nitrogen pressure control
- Oxygen monitoring
- Condenser
- Peristaltic feed pump
- Pneumatic hammer
- HEPA filters
- Bag filter

Options

- Two-fluid nozzle atomizer, counter-current
- Centrifugal atomizer
- Additional powder contatiner
- Simple manual cleaning equipment
- GMP documentation (IQ, OQ) FAT, SAT protocols
- GMP execution
- Noise attenuation

Other configurations

Nitrogen single pass


For specific requirements, please contact SPX FLOW




MICRASPRAY 150CC	
Max. inlet air temperature	200°C
Max. drying air rate	150 kg/h
Drying chamber diameter	900 mm
Power supply, standard, at 50 Hz	3x400 V
Suction fan	2.2 kW
Electrical N ₂ heater	18 kW
Feed pump	0.18 kW
N ₂ consumption	5-25 Nm³/h

MICRASPRAY 150CC	
Noise emission	85 dB(A)
Product contacting parts	AISI 316L
External surfaces	AISI 304
Floor space L x W	4.1 x 1.9 m
Height	3.1 m
Recommended free height	3.1 m
Weight, net approx.	1,800 kg

The MicraSpray 150CC plant design complies with CE, ATEX, and GMP guidelines for food contact material.

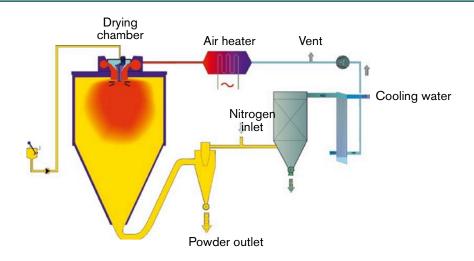

Water evaporation rate kg/h

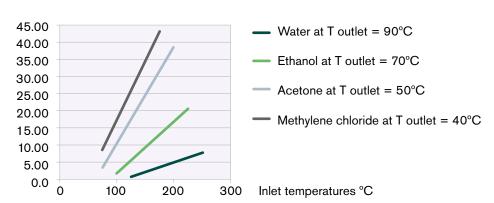

SPXFLOW

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. The green ">" is a trademark of SPX FLOW, Inc.

For more information, visit www.spxflow.com/anhydro. Email: ft.dk.soeborg@spxflow.com