

WAUKESHA Series 200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
% = Efficiency Percentage



CAPACITY CURVES

Based on water at 70°F. (22°C.)

MODEL: 2065HV

50 Hz 1450 RPM

SIZE: 3 x 2 x 6-1/2

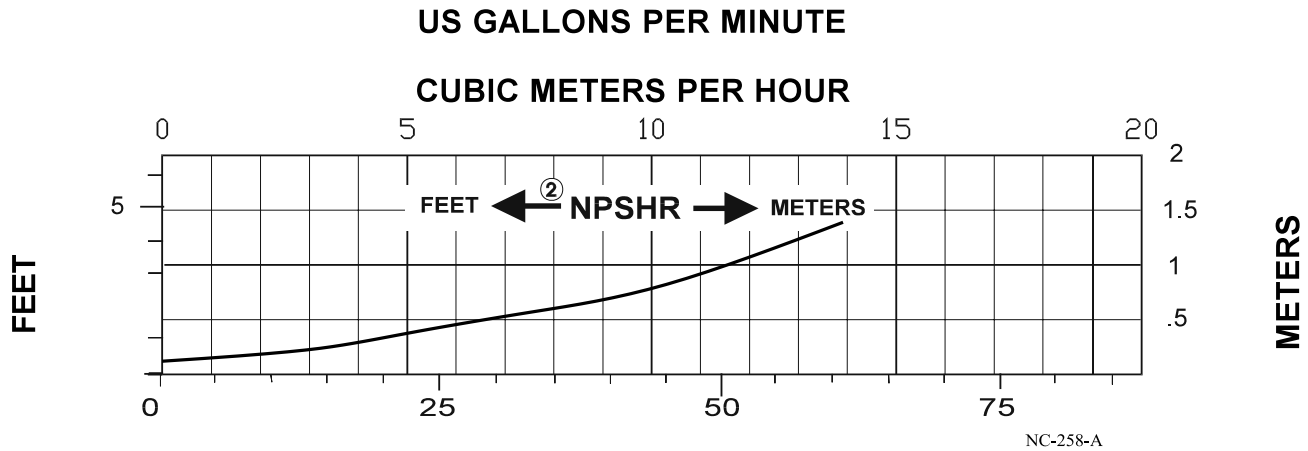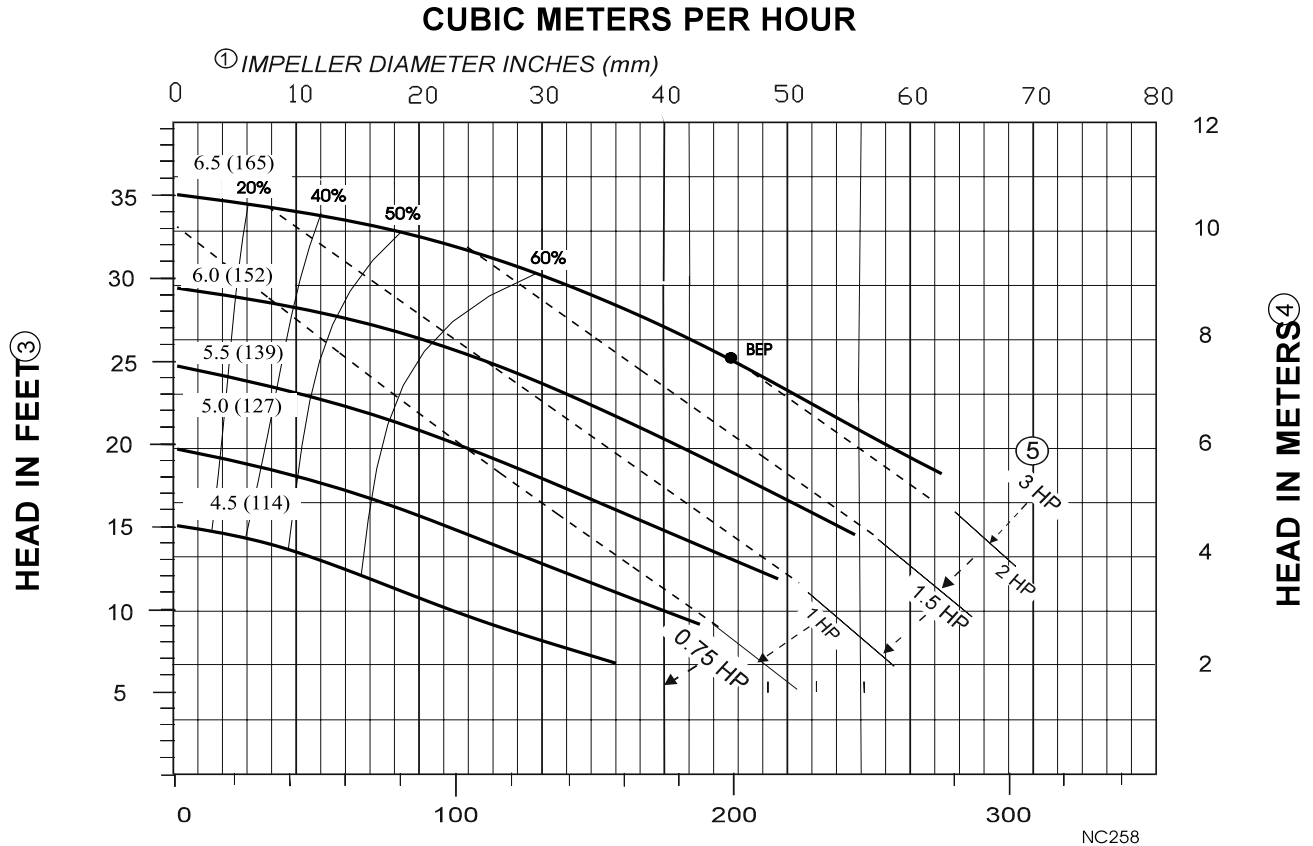

NOTES

- ① Impeller diameters available in 1/16-inch increments
- ② NPSHR is shown for maximum impeller diameter
- ③ PSI = $\frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.31}$
- ④ $\text{Kg/cm}^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $\text{HP} \times 0.746 = \text{Kw}$



Waukesha
Cherry-Burrell

611 Sugar Creek Road
Phone: 262-728-1900
www.spxflow.com/wcb

Delavan, WI 53115
Fax 262-728-4904

CURVE NUMBER
95-07040

EFFECTIVE DATE
5-24-2002

PAGE NUMBER
040