WAUKESHA Series S200 CENTRIFUGAL PUMPS


= Best Efficiency Point% = Efficiency Percentage

CAPACITY CURVES

Based on water at 70°F. (22°C.)

MODEL: \$2065 50 Hz 1450 RPM SIZE: 2.5 x 2.0 x 6.5

Flow Cubic Meters Per Hour

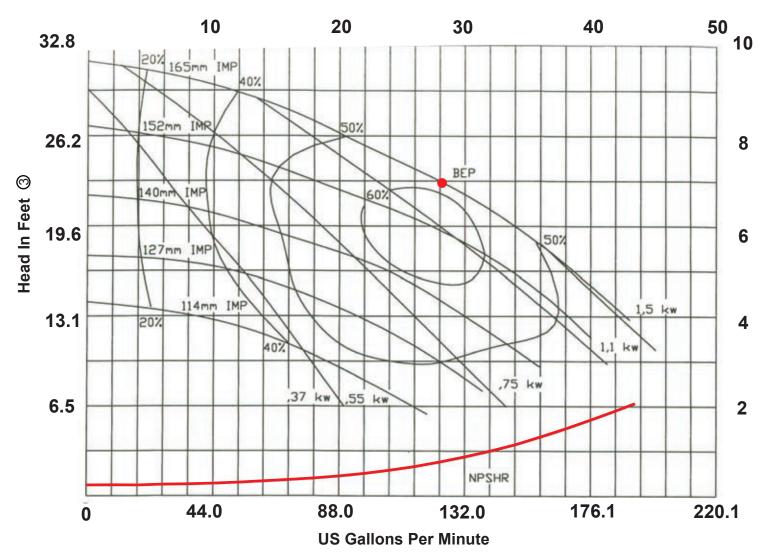

NOTES

- 1 Impeller diameters available in 1/16-inch increments
- (2) NPSHR is shown for maximum impeller diameter
- 3 PSI = <u>Head in Feet X Specific Gravity</u>

- (4) Kg/cm² = <u>Head in Meters X Specific Gravity</u>
- (5) HP x 0.746 = Kw



611 Sugar Creek Road Phone: 262-728-1900 www.spxflow.com/wcb Delavan, WI 53115 Fax 262-728-4904