

WAUKESHA Series 200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
% = Efficiency Percentage


CAPACITY CURVES

Based on water at 70° F (22° C)

MODEL: 2075

50 Hz • 2900 RPM

SIZE: 3 x 1-1/2 x 8-1/2

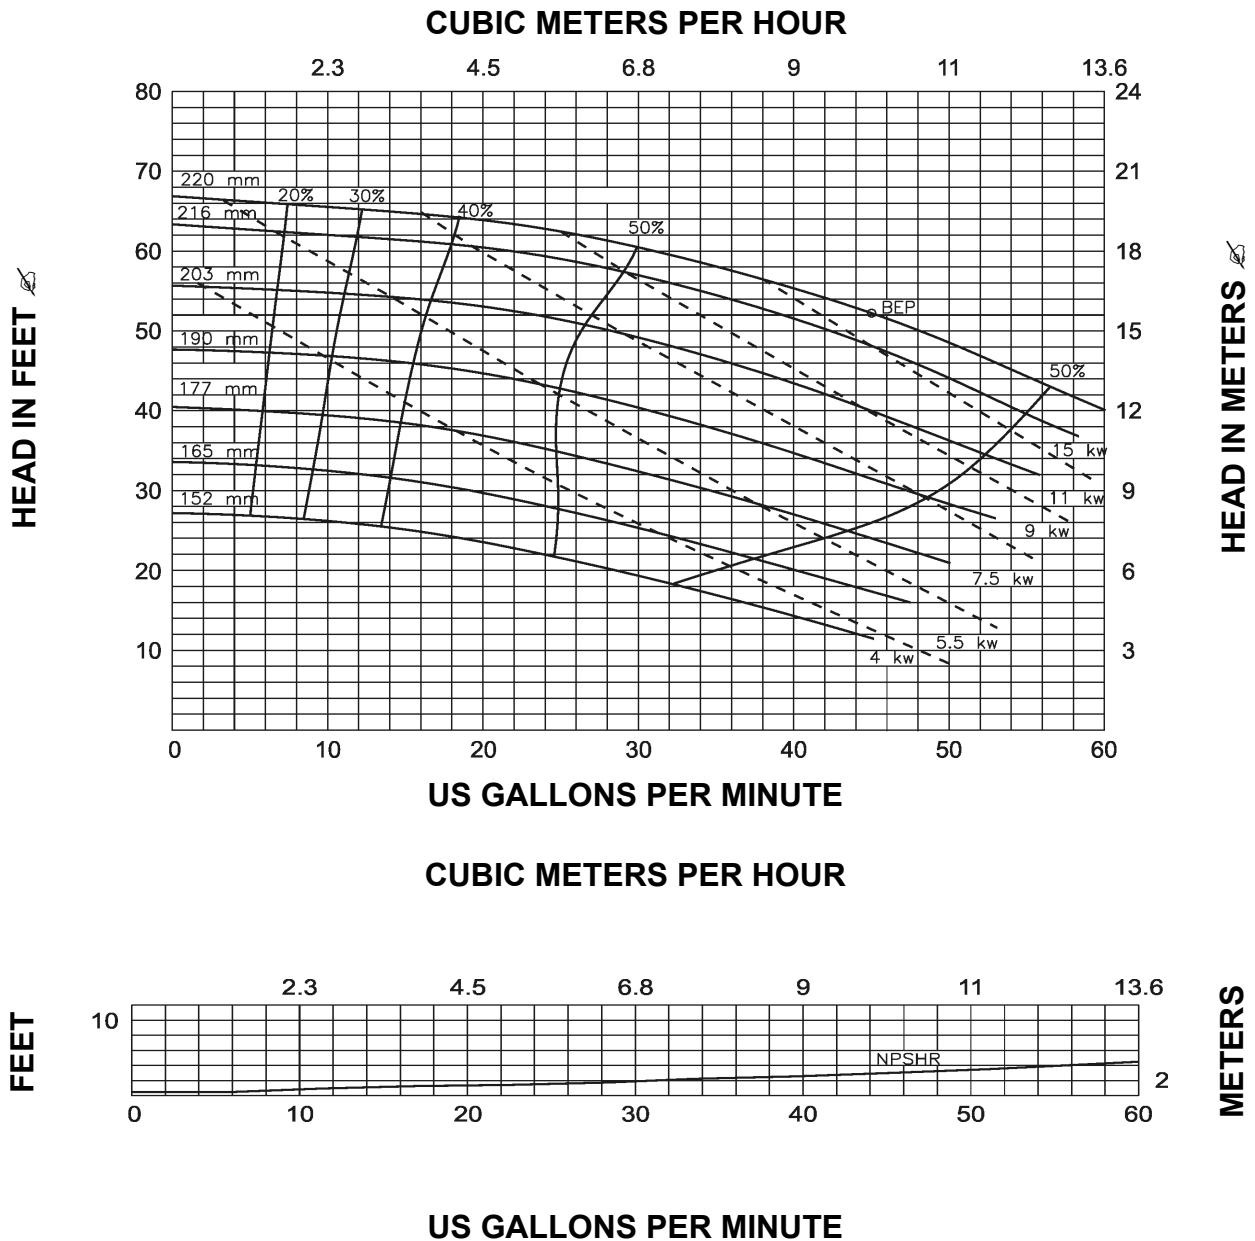

NOTES

① Impeller diameters available in 1/16-inch increments

⚡ NPSHR is shown for maximum impeller diameter

⚡ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$

⚡ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$

⚡ $HP \times 0.746 = Kw$

Waukesha
Cherry-Burrell®

611 Sugar Creek Road
Delavan, WI 53115

Phone: 262-728-1900
Fax: 262-728-4904

CURVE NUMBER

95-07242

EFFECTIVE DATE

April 2005

PAGE NUMBER

3